

High speed rolling Door

Looksystem



Complies with the standard

EN 13241-1

Agreement N° P05-047



**An innovative Aluminium frame
A nice and friendly design**

➔ **Looksystem** is nowadays the technological answer for intense traffic management. It has been designed with three goals in mind:

- **Innovative**, with its full aluminium frame (corrosion free)
- **Friendly**, reliable and easy to install
- **Nice**, with its modular structure and its cover hiding the silent mechanism

With **Looksystem record** truly innovates in the supermarket/hypermarket world



www.agta-record.com



High speed rolling door

Looksystem



A simple and sturdy door designed for heavy traffic :


- Presence detection assured by a double row of safety cells.
- Twin speed motor– up speed $1 \text{ m} \cdot \text{s}^{-1}$ – down speed $0.49 \text{ m} \cdot \text{s}^{-1}$
- Industrial control panel with heavy duty PLC and contactors
- Door panel assembled by ultrasonic welding
- Prestressed polyester fabric $670\text{g}/\text{m}^2$ laminated both sides with PVC.

A wide range of colors and solutions to meet all your expectations :

- 15 panel colors available as standard
- Your logo or picture printed on the door panel *
- Frame powder coated (RAL color on choice)
- Horizontal vision panel *
- Every possible opening actuators manual or automatic
 - Push button, pullswitch, remote control...
 - Radars, photo cells, induction loop...

People and building safety :


- Extra people safety :
 - Safety edge *
 - Infrared detection*, light barriers*
 - Laser detection *
- Product complies with standard EN 13241-1
 - Electromagnetic compatibility directive compliance
 - IP 65 Control panel
- Emergency openings :
 - Containment pin *
 - Shoulder high crank handle *



A large choice of colors is available to integrate Looksystem to your environment

Up to 3m x 3m !
The supermarket reference

- Corrosion free aluminum structure
- Low 380 mm headroom
- The best looking door on the market

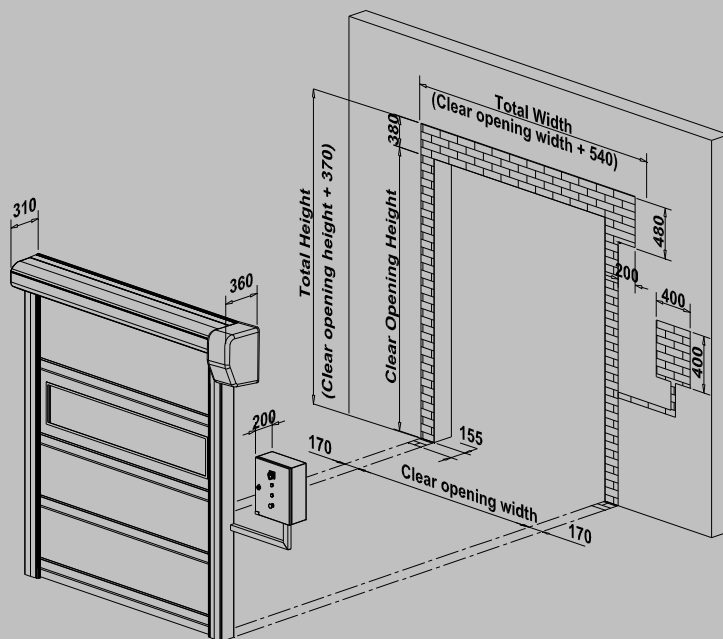

Engine

2 speed three-phase 380V
0,18/0,25 Kw
Left or right side

Operating speed

Opening $1 \text{ m} \cdot \text{s}^{-1}$ - Shutting $0,49 \text{ m} \cdot \text{s}^{-1}$

Control panel

Industrial control
Steel case (w) 400 x (h) 400 x (d) 200
IP 65 protection class

Wind load

Class 1 (interior door)

* Optional equipment

Production



record industry SA – F38

www.agta-record.com

